

# Rate Control for Streaming Video over Wireless

Minghua Chen *Student Member, IEEE* and Avideh Zakhor *Fellow, IEEE*

**Abstract**—Rate control is an important issue in video streaming applications for both wired and wireless networks. A widely accepted rate control method in wired networks is TCP Friendly Rate control (TFRC) [4]. It is an equation based rate control in which the TCP Friendly rate is determined as a function of packet loss rate, round trip time and packet size. TFRC assumes that packet loss in wired networks is primarily due to congestion, and as such is not applicable to wireless networks in which the main cause of packet loss is at the physical layer. In this paper, we review existing approaches to solve this problem. Then we propose multiple TFRC connections as an end-to-end rate control solution for wireless video streaming. We show that this approach not only avoids modifications to the network infrastructure or network protocol, but also results in full utilization of the wireless channel. NS-2 simulations, actual experiments over 1xRTT CDMA wireless data network, and video streaming simulations using traces from the actual experiments, are carried out to characterize the performance, and show the efficiency of our proposed approach.

## I. INTRODUCTION

**R**ATE control is important to multimedia streaming applications in both wired and wireless networks. First, it results in full utilization of bottleneck links by ensuring sending rates are not too low. Second, it prevents congestion collapse by ensuring sending rates are not too aggressive. For example there was an actual network collapse of the Internet in Oct. 1986 at University of California at Berkeley resulting in serious performance degradation (Section I in [1]). Finally, proper rate control ensures fairness between users sharing common links in a given network.

A widely popular rate control scheme for streaming in wired networks is equation based rate control [4] [5] [7], also known as TCP Friendly Rate Control (TFRC). In TFRC, the TCP friendly rate is determined as a function of packet loss rate, round trip time, and packet size, so as to mimic the long term steady performance of TCP. There are basically three advantages to rate control using TFRC: first, it can fully utilize bottleneck capacities while preventing congestion collapse. Second, it is fair to TCP flows, which are the dominant source of traffic on the Internet. Third, the TFRC results in small rate fluctuation, making it attractive for streaming applications that require constant video quality. The *key* assumption behind TCP and TFRC is that packet loss is a sign of congestion. In wireless networks however, packet loss is dominated by physical channel errors, violating this key assumption. Neither TFRC nor TCP can distinguish between packet loss due to buffer overflow, and that due to physical layer errors. As we show later, this results in underutilization of the wireless

channel. For examples, our experiments later show that TFRC can only utilize 56% of the wireless bandwidth on Verizon 1xRTT wireless data network [33]. Hence rate control for streaming applications over wireless is still an open problem.

There have been a number of efforts to improve the performance of TCP or TFRC over wireless [10]–[30], [32]. These approaches either hide end-hosts from packet loss caused by wireless channel error, or provide end-hosts the ability to distinguish between packet loss caused by congestion, and that caused by wireless channel error. To gain a better understanding of the spectrum of approaches to rate control over wireless, we briefly review TCP and TFRC solutions over wireless.

Snoop, a well-known solution, is a TCP-AWARE local retransmission link layer approach [10]. A Snoop module resides on router or base station on the last hop, i.e. the wireless link, and records a copy of every forwarded packets. Assuming snoop module can access TCP acknowledgement packets (ACK) from the TCP receiver, it looks into the ACK packets and carries out local retransmissions when a packet is corrupted by wireless channel errors. While doing the local retransmission, the ACK packet is suppressed and not forwarded to the TCP sender. Other similar approaches based on local link layer retransmission include [11]–[13], [16]–[18]. These schemes can potentially be extended to TFRC in order to improve performance, by using more complicated treatment of the ACK packets from the TFRC receiver.

Explicit Loss Notification (ELN) can also be applied to notify TCP/TFRC sender when a packet loss is caused by wireless channel errors rather than congestion [14], [15]. In these case, TFRC can take into account only the packet loss caused by congestion when adjusting the streaming rate.

End-to-end statistics can be used to help detect congestion when a packet is lost [19]–[30]. For example, by examining trends in the one-way delay variation, Parsa and Garcia-Luna-Aceves [29] interpret loss as a sign of congestion if one-way delays are increasing, and a sign of wireless channel error otherwise. One-way delay can be associated with congestion in the sense that it monotonically increases if congestion occurs as a result of increased queueing delay, and remains constant otherwise. Similarly, Barman and Matta proposed a loss differentiation scheme based on the assumption that the variance of round trip time is high when congestion occurs, and is low otherwise [25].

Cen et. al. present an end-to-end based approach to facilitate streaming over wireless [22]. They combine packet inter-arrival times and relative one way delay to differentiate between packet loss caused by congestion and that due to wireless channel errors. There are two key observations behind their approach; first, relative one way delay increases monotonically if there is congestion; second, inter-arrival time

This work was supported by AFOSR contract F49620-00-1-0327.

M. Chen and A. Zakhor are with Video and Image Processing Lab, Department of Electrical Engineering and Computer Science at University of California at Berkeley, Berkeley, CA 94720 USA (e-mail: {minghua, avz}@eecs.berkeley.edu).

is expected to increase if there is packet loss caused by wireless channel errors. Therefore, these two statistics can help differentiate between congestion and wireless errors. However, the high wireless error misclassification rate may result in under-utilizing the wireless bandwidth, as shown in [22]. Yang et. al. [27] also propose a similar approach to improve video streaming performance in presence of wireless error, under the assumption that wireless link is the bottleneck.

Other schemes such as [19]–[21], [23], [24], [26] that use end-to-end statistics to detect congestion, can also be combined with TFRC for rate control. The congestion detection scheme can be used to determine whether or not an observed packet loss is caused by congestion; TFRC can then take into account only those packet losses caused by congestion when adjusting streaming rate.

Tang et. al. proposed an idea of using small dummy packets to actively probe whether the network is congested in case of packet loss, so as to differentiate between packet loss due to congestion and that due to channel error [32]. Yang et. al. [31] propose a cross-layer scheme that uses link layer information to determine whether a packet loss is caused by channel error or congestion, assuming that only the last link is wireless. In this approach, when a packet is lost, TFRC goes beyond layering abstraction and enquires the link layer about the recent signal strength. The packet loss is recognized due to wireless channel error if recent signal strength is low, and due to congestion otherwise.

The disadvantage of end-to-end statistics based approaches is that congestion detection schemes based on statistics are not sufficiently accurate, and they either require cross layer information or modifications to the transport protocol stack.

Another alternative is to use non-loss based rate control schemes. For instance, TCP Vegas [2], in its congestion avoidance stage, uses queueing delay as a measure of congestion, and hence could be designed not to be sensitive to any kind of packet loss, including that due to wireless channel error. It is also possible to enable the routers with ECN markings capability to do rate control using ECN as the measure of congestion [3]. As packet loss no longer corresponds to congestion, ECN based rate control does not adjust sending rate upon observing a packet loss.

In this paper, we explore the necessary and sufficient condition under which using one TFRC connection in wireless streaming applications results in under-utilization of the wireless bandwidth. We then propose the use of multiple simultaneous TFRC connections for a given wireless streaming application. The advantages of our approach are as follows: first, it is an end-to-end approach, and does not require any modifications to network infrastructure and protocols, except at the application layer. Second, it has the potential to fully utilize the wireless bandwidth provided the number of connections and packet size are selected appropriately. A more detailed exposition of our proposed approach can be found in [33].

The rest of this paper is structured as follows. In Section II, we analyze the performance of one TFRC connection over wireless and show conditions under which it underutilizes the wireless channel. We then propose an optimal strategy based

on multiple TFRC connections to fully utilize the wireless channel. In Section III, we propose a practical system called MULTFRC to implement the approach discussed in Section II. NS-2 simulations, actual experimental results, and video streaming simulations using traces from the actual experiments are included in Section IV. Conclusions and future work are in Section V.

## II. PROBLEM FORMULATION

In this section, we analyze the performance of one TFRC over wireless and show conditions under which it underutilizes the wireless channel. We then propose a rate control strategy based on opening multiple TFRC connections, that has the potential to achieve optimal performance, i.e. maximum throughput, and minimum end-to-end packet loss rate.

### A. Setup and Assumptions

The typical scenario for streaming over wireless is shown in Figure 1 where a video server  $s$  in the wired network is streaming video to a receiver  $r$  in the wireless network. The wireless link is assumed to have available bandwidth  $B_w$ , and packet loss rate  $p_w$ , caused by wireless channel error. There could also be packet loss caused by congestion at node 2, denoted by  $p_c$ . The end-to-end packet loss rate observed by receiver is denoted by  $p$ , and the streaming rate is denoted by  $T$ . We refer to the wireless channel as underutilized if the streaming throughput is less than the maximum possible throughput over the wireless link, i.e.  $T(1-p) < B_w(1-p_w)$ .

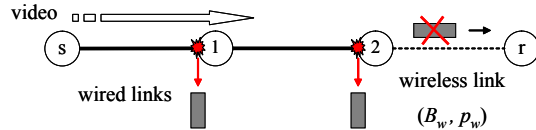


Fig. 1. Typical scenario for streaming over wireless.

Given this scenario, we assume the following. First, there are no cross traffic at either node 1 or node 2; for the case with cross traffic, see [33]. Second, in the long term, the wireless link is assumed to be the bottleneck. By this, we mean there is no congestion and queueing delay at node 2 if and only if wireless bandwidth is underutilized, i.e. we achieve  $p_c = 0$  and minimum round trip time, defined as  $RTT_{min}$ , if and only if  $T \leq B_w$ . When  $T > B_w$ , we have  $p_c \geq 0$  and  $rtt \geq RTT_{min}$ . Fourth,  $B_w$  and  $p_w$  are assumed to be constant, at least on the time scale the analysis is carried on; packet loss caused by wireless channel error is assumed to be random and stationary. Fourth, for simplicity, the backward route is assumed to be error-free and congestion-free.

Based on this scenario, two goals of our rate control scheme can be stated as follows. First, the streaming rate should not cause any network instability, i.e. congestion collapse. Second, it should lead to the optimal performance, i.e. highest possible throughput<sup>1</sup> and lowest possible packet loss rate.

<sup>1</sup>Clearly, in situations where the network bandwidth is not a bottleneck, achieving highest possible throughput might not necessarily be the appropriate metric to optimize. An example of this would be single video session in a 802.11b wireless LAN.

TFRC can clearly meet the first goal, because it has been shown (a) to be TCP-friendly, and (b) not to cause network instability. In the remainder of this paper, we propose ways of achieving the second objective listed above, using a TFRC-based solution, without modifying the network infrastructure and protocols.

### B. A Sufficient and Necessary Condition for Under-utilization

We use the following model for TFRC in the analysis [5]:

$$T = \frac{kS}{rtt\sqrt{p}}, \quad (1)$$

where  $T$  represents the sending rate,  $S$  is the packet size,  $rtt$  is the end-to-end round trip time,  $p$  is the end-to-end packet loss rate, and  $k$  is a constant factor. Although this model has been refined to improve accuracy [4], [6], it is simple, easy to analyze, and more importantly, it captures all the fundamental factors that affect the sending rate. Furthermore, the results we derive based on this simple model can be extended to other more sophisticated models, such as the one used in [4].

The overall packet loss rate is  $p$ , a combination of  $p_w$  and  $p_c$ , and can be written as:

$$p = p_w + (1 - p_w)p_c. \quad (2)$$

This shows that  $p_w$  is a lower bound for  $p$ , and that the bound is reached if and only if there is no congestion, i.e.  $p_c = 0$ . Combining this observation and (1), an upper bound,  $T_b$ , on the streaming rate of one TFRC connection can be derived as follows:

$$T \leq \frac{kS}{RTT_{min}\sqrt{p_w}} \equiv T_b \quad (3)$$

If there is no congestion, i.e.  $p_c = 0$ , and hence no queuing delay caused by congestion, we get  $rtt = RTT_{min}$ ,  $p = p_w$ , and  $T$  achieves the upper bound  $T = T_b$  in (3). In this case, the throughput is  $T_b(1 - p_w)$ , which is the upper bound of throughput given one TFRC connection for the scenario shown in Figure 1. Based on these, we can state the following:

*Theorem 1: Given the scenario and assumptions in Section II-A, sufficient and necessary condition for one TFRC connection to under-utilize wireless link is*

$$T_b < B_w. \quad (4)$$

**Proof:** See the proof of Theorem 1 in [33].

This implies that if the available bandwidth is larger than the highest sending rate one TFRC can achieve, then under-utilization happens. In essence, the approaches taken in [10]–[24], [26]–[30] ensure the condition in (4) is not satisfied, through modifications to network infrastructure or protocols. For example in the TFRC-AWARE Snoop-like solution,  $p_w$  becomes effectively zero after local retransmissions, and thus (4) can never be satisfied. By effectively setting  $p_w = 0$ , Snoop-like module translates the new problem, i.e. rate control for streaming over wireless, into an old one, i.e. rate control for streaming over wired network, for which a known solution exists. Similar observations can be made for other solutions such as the end-to-end statistics based approaches [19]–[24], [26]–[30].

### C. A Strategy to Reach the Optimal Performance

It is not necessary to avoid the condition in (4) in order to achieve reasonable performance for one *application*. This is because it is conceivable to use multiple simultaneous connections for one application. The total throughput of the application is expected to increase with the number of connections until it reaches the hard limit of  $B_w(1 - p_w)$ .

Given the scenario shown in Figure 1, and the assumptions stated in Section II.A, we now argue that multiple connections can be used to achieve optimal performance, i.e. throughput of  $B_w(1 - p_w)$ , and packet loss rate of  $\hat{p}_w$ . To see this, let us consider a simple example in which

$$B_w(1 - p_w) = \frac{2.5kS}{RTT_{min}\sqrt{p_w}}(1 - p_w) = 2.5T_b(1 - p_w)$$

By opening one TFRC connection with packet size  $S$ , the application achieves a throughput of  $\frac{kS}{RTT_{min}\sqrt{p_w}}(1 - p_w) = T_b(1 - p_w)$  and packet loss rate of  $p_w$ . This is because according to Theorem 1, under-utilization implies  $rtt = RTT_{min}$ ,  $p = p_w$  and  $T = \frac{kS}{RTT_{min}\sqrt{p_w}} = T_b$ .

Let us now consider the case with two TFRC connections from sender  $s$  to receiver  $r$  in Figure 1. Following the assumptions and analysis in Sections II.A and II.B, since  $p_w$  for each of the two TFRC connections remain unchanged from the case with one TFRC connection, the throughput upper bound for each of the two TFRC connections is  $\frac{kS}{RTT_{min}\sqrt{p_w}}(1 - p_w) = T_b(1 - p_w)$ , and the aggregate throughput upper bound for both of them is  $2\frac{kS}{RTT_{min}\sqrt{p_w}}(1 - p_w) = 2T_b(1 - p_w)$ , which is smaller than  $B_w(1 - p_w)$ , implying channel under-utilization and no congestion. Consequently, end-to-end packet loss rate  $p$  is at  $p_w$ , and the total throughput for both connections is  $2\frac{kS}{RTT_{min}\sqrt{p_w}}(1 - p_w)$ .

A similar argument can be repeated with three TFRC connections, except that the wireless channel is no longer under-utilized and  $rtt > RTT_{min}$ . Furthermore, if the buffer on node 2 overflows then  $p_c$  will no longer be zero, and hence using Eqn. (2) we get  $p > p_w$ . In this case the wireless link is still fully utilized at  $T(1 - p) = B_w(1 - p_w)$ , but round trip time is no longer at the minimum value  $RTT_{min}$ , and overall packet loss rate  $p$  could exceed  $p_w$ , i.e. the overall packet loss rate in the two connections case.

In general, given  $B_w$ ,  $p_w$ , and the packet size  $S$  for each connection, it can be shown that when full wireless channel utilization occurs, the optimal number of connections,  $n_{opt}$ , satisfies:

$$B_w(1 - p_w) = \frac{n_{opt} kS(1 - p_w)}{RTT_{min}\sqrt{p_w}} \Rightarrow n_{opt}S = B_w \frac{RTT_{min}\sqrt{p_w}}{k} \quad (5)$$

Thus what really matters is the product of  $n_{opt}$  and  $S$ , and as such, it is always possible to achieve full wireless channel utilization by choosing  $n_{opt}$  to be an integer, and selecting  $S$  accordingly<sup>2</sup>. It is also possible to analyze the case with different packet sizes for different connections, but it is not fundamentally different from the case with the same packet

<sup>2</sup>Of course  $p_w$  may also change when packet size changes, but for the sake of simplicity, we assume  $p_w$  is fixed as packet size changes. Analysis can be extended given a relation between  $p_w$  and  $S$ . The point here is to exploit packet size as a way to achieve finer granularity in rate increase/decrease.

size for all connections. For the rest of the paper, we assume the packet size  $S$  is fixed. Then, the optimal number of connections is given by

$$\left\lfloor B_w \frac{RTT_{min} \sqrt{p_w}}{kS} \right\rfloor \equiv \hat{n}_{opt} \quad (6)$$

resulting in throughput of  $\hat{n}_{opt} \frac{kS}{RTT_{min} \sqrt{p_w}} (1 - p_w)$  and packet loss rate of  $p_w$ . Opening more than  $\hat{n}_{opt}$  connections results in larger  $rtt$ , or possibly higher end-to-end packet loss rate.

To summarize, if the number of TFRC connections is too small so that the aggregate throughput is smaller than  $B_w(1 - p_w)$ , wireless channel becomes under-utilized. If the number of connections is chosen optimally based on (5), then wireless channel becomes fully utilized, the total throughput becomes  $B_w(1 - p_w)$ , with  $rtt = RTT_{min}$ , and the overall packet loss rate achieves the lower bound  $p_w$ . However, if the number of connections exceeds  $\hat{n}_{opt}$ , even though the wireless channel continues to be fully utilized at  $B_w(1 - p_w)$ , the  $rtt$  will increase beyond  $RTT_{min}$  and later on packet loss rate can exceed the lower bound  $p_w$ . The intuition here is that as number of connections exceeds  $\hat{n}_{opt}$ , the sending rate of each connection has to decrease. Thus by (1), the product  $rtt \sqrt{p}$  has to increase, so either  $rtt$  increases or  $p$  increases, or they both increase. For NS-2 simulations and actual experiments to validate this, see [33].

Based on the above, a strategy leading to optimal performance can be described as follows: *keep increasing the number of connections until an additional connection results in increase of end-to-end round trip time or packet loss rate.* In Section III, we use this observation to develop a practical scheme called MULTFRC to determine the optimal number of connections.

### III. PROPOSED SOLUTION: MULTIPLE TFRC (MULTFRC)

The basic idea behind MULTFRC is to measure the round trip time, and adjust the number of connections accordingly so as to (a) utilize the wireless bandwidth efficiently, and (b) ensure fairness between applications. There are two components in our proposed system:  $rtt$  measurement sub-system (RMS), and connections controller sub-system (CCS), both of them residing at the sender.

RMS measures average  $rtt$  over a window, denoted by  $ave\_rtt$ , and reports it to the CCS. Specifically, RMS receives average  $rtt_{sample}$ , measured in the past round trip time window, from receiver every round trip time. RMS then further computes a smoothed version of these average  $rtt$ 's every  $m$  reports, i.e.  $ave\_rtt = \frac{1}{m} \sum_{i=1}^m rtt\_sample_i$ . Here one can set  $m$  to be large values to reduce the noise in  $ave\_rtt$ , or be small values to make the system more responsive to changes in round trip time.

Inspired by TCP, CCS's basic functionality is to Inversely Increase and Additively Decrease (IIAD( $\alpha, \beta$ )) the number of connections  $n$ , based on the input from RMS with  $\alpha$  and  $\beta$  being preset constant parameters. Specifically, it first sets the  $rtt\_min$  as the minimum  $ave\_rtt$  seen so far, and then adapts

the number of connection  $n$  as follows:

$$n = \begin{cases} n - \beta, & \text{if } ave\_rtt - rtt\_min > \gamma rtt\_min; \\ n + \alpha/n, & \text{otherwise.} \end{cases} \quad (7)$$

where  $\gamma$  is a preset parameter. The reason for this is fair and efficient sharing among multiple MULTFRC applications, and between MULTFRC and TCP or TFRC connections.

For a given route,  $ave\_rtt - rtt\_min$  corresponds to current queuing delay, and  $\gamma rtt\_min$  is a threshold on the queuing delay that MULTFRC can tolerate before it starts to decrease the number of connections. Ideally,  $ave\_rtt$  becomes larger than  $rtt\_min$  if and only if the link is fully utilized, and the queue on bottleneck link router is built up, introducing additional queuing delay. Thus by evaluating the relation between  $ave\_rtt$  and  $rtt\_min$ , MULTFRC detects full utilization the wireless link, and controls the number of connections accordingly.

When there is a route change either due to change in the wireless base station, or due to route change within the wired Internet, the value of  $rtt\_min$  changes, affecting the performance of MULTFRC. Under these conditions, it is conceivable to use route change detection tools such as traceroute [38] to detect the route change, in order to reset  $rtt\_min$  to a new value. Furthermore, it can be argued that the overall throughput of MULTFRC will not go to zero, resulting in starvation; this is because MULTFRC always keeps at least one connection open.

In [33], we have evaluated the performance of MULTFRC system through NS-2 simulations and actual experiments over Verizon Wireless 1xRTT CDMA data network. We have shown via simulations that MULTFRC can achieve reasonable utilization of the wireless bandwidth, and does not starve applications that use one TCP connection.

For actual experiments over 1xRTT, we stream from a desktop connected to Internet via 100 Mbps Ethernet in EECS domain at U.C. Berkeley, to a notebook connected to Internet via Verizon Wireless 1xRTT CDMA data network. In this case it is quite likely that the 1xRTT CDMA link is the bottleneck for the streaming connection. The 1xRTT CDMA data network is advertised to operate at data speeds of up to 144 kbps for one user. As we explore the available bandwidth for one user using UDP flooding, we find the average available bandwidth averaged over eight 30 minutes-long streaming sessions to be between 80 kbps to 97 kbps. The packet size  $S$  is 1460 bytes. As we cannot control  $p_w$  in actual experiments, we measure the average throughput, average number of connections, and packet loss rate. We compare the performance of MULTFRC system and one TFRC connection in Table I. As seen, MULTFRC on average opens 1.8 connections, and results in 60% higher throughput at the expense of a larger round trip time, and higher packet loss rate.

TABLE I

ACTUAL EXPERIMENTAL RESULTS OVER 1XRTT CDMA.

scheme	throughput (kbps)	rtt (ms)	packet loss rate	ave. # of conn.
one TFRC	54	1624	0.031	N/A
MULTFRC	86	2512	0.045	1.8

TABLE II  
PACKET LOSS DETAILS OF MULTFRC

# of conn.	% of time	pkt loss rate	avg. burst len	snd. dev.	max. burst len
one	24.6	0.015	2.86	3.43	7
two	60.1	0.047	2.41	3.63	10
three	15.4	0.083	3.25	9.93	11

Table II shows packet loss details of MULTFRC for a 30 minutes long experiment with packet size of 760 bytes. As expected, both the packet loss rate and burstiness of the loss increase as the number of connections increases.

#### IV. VIDEO STREAMING SIMULATIONS

To evaluate the performance of MULTFRC in video streaming applications, we simulate streaming of a 60 second long video clip through a channel, with throughput trace corresponding to one of the traces obtained from actual experiments over 1xRTT CDMA as described in Section III. Our goal is to compare the quality of video streaming achievable using one TFRC connection with that of MULTFRC.

We encode 300 frames of *news.cif* sequence using MPEG-4 at bit rates varying from 50kps to 100 kbps<sup>3</sup> as controlled by TMN-5 [39]. The frame rate is 10 frame per second; the I-frame refresh rate is once every fifteen frames. The coded video bit stream is packetized with fixed packet size of 760 bytes. The packets are then protected using Reed-Solomon (RS) codes with different protection levels for one TFRC and MULTFRC. This is because packet loss statistics are different in the two cases. Specifically, the statistics of 30 minutes long trace indicates the longest burst loss to be 6 packets long for one TFRC and 11 packets long for MULTFRC. Thus, we apply RS(56,50) to one TFRC case, and RS(61,50) to MULTFRC case in order to sufficiently protect packets in both cases. Under ideal conditions where all packets in both schemes get through, the decoded video quality is identical between the two schemes. This is because before adding RS code, the source video bit rate is chosen to be the same for both schemes.

The RS-coded packets are then passed through channels simulated using one TFRC, and MULTFRC packet level traces each lasting 70 seconds, selected from the 30 minutes long actual experiments described in Section III. The throughput and packet loss details for a 70 second long segment of one TFRC and MULTFRC connections are shown in Fig. 2. As seen, both throughput and packet loss rate are higher for MULTFRC than for one TFRC case. The large throughput fluctuations in MULTFRC due to changing number of connections can potentially be argued not to be suitable for video applications in general; however, proper buffering can absorb these fluctuations in non-delay sensitive streaming applications.

The receiver decodes the received RS-coded packets and stores the MPEG-4 bit streams into a playback buffer. In this simulation, we fill the buffer with 10 seconds worth of data before starting the MPEG-4 decode and display process. The

<sup>3</sup>Our choices of video bit rates are related to the available bandwidth in today's cellular telephony networks.

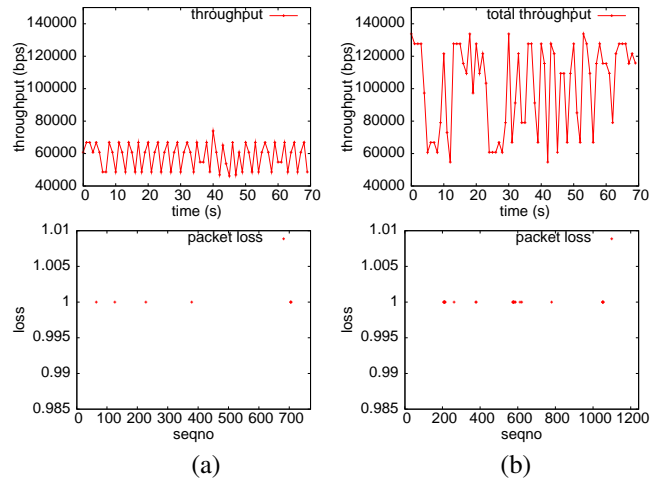


Fig. 2. Throughput and packet loss details for (a) one TFRC; (b) MULTFRC.

playback rate is fixed at 10 frames per second, and hence decoding process is stopped and the display is frozen whenever the playback buffer is empty.

To show the efficiency of MULTFRC, we compare the playback buffer occupancies of MULTFRC and one TFRC for several bit rates in Fig. 3. As seen, compared to one TFRC case, MULTFRC can sustain video streaming at averagely higher bit rates and hence higher visual quality, despite the fact that it needs stronger FEC to combat the higher packet loss rate.

#### V. DISCUSSION AND FUTURE WORK

Other similar, but not related work to our approach include MULTCP [36] and NetAnts [37], which open multiple connections to increase throughput. MULTCP was originally proposed to provide differential service, and was later proposed to improve the performance in high bandwidth-round-trip-time product networks [36]. NetAnts achieves higher throughput by opening multiple connections to compete for bandwidth against others applications [37]. Since fairness of TCP is more important at the connection level than application level, opening more connections can result in higher individual throughput. The differences between NetAnts and our approach are as follows. First, opening more connections than needed in wired networks unnecessarily increases the end-to-end packet loss rate experienced by end-host. Second, unlike our approach, there is no mechanism to control the number of connections in NetAnts.

Future work includes the stability, scalability and fairness analysis of our proposed approach. In particular, we are currently investigating fairness issue between MULTFRC and TCP [34]. We also plan to investigate the possibility of applying our approach to improve the performance of TCP over wireless. Finally, it would be interesting to quantify the achieved improvement in video quality resulting from MULTFRC.

#### REFERENCES

- [1] Jacobson V, "Congestion avoidance and control", *Proceedings of ACM SIGCOMM*, 1998:314-329.

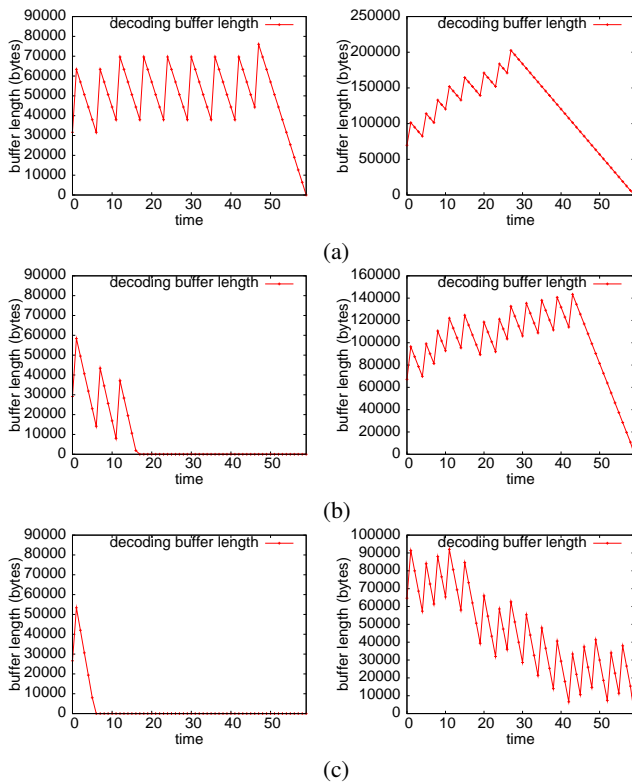


Fig. 3. Throughput and packet loss details for one TFRC (left) and MULTFRC (right): the streaming bit rate is at (a) 50kbps; (b) 70kbps; (c) 90kbps.

- [2] Lawrence S. Brakmo, Larry L. Peterson, "TCP Vegas: end-to-end congestion avoidance on a global Internet", *IEEE Journal on Selected Areas in Communications*, 13(8):1465-80, Oct. 1995
- [3] S. Floyd, "TCP and Explicit Congestion Notification", *ACM Computer Communication Review*, 24:10-23, October 1994
- [4] Sally Floyd, Mark Handley, Jitendra Padhye and Joerg Widmer, "Equation-Based Congestion Control for Unicast Applications", *Proc. ACM SIGCOMM 2000*, Aug. 2000, pp. 43 - 56
- [5] S. Floyd and K. Fall, "Promoting the Use of End-to-End Congestion Control in the Internet", *IEEE/ACM Transactions on Networking*, Aug. 1999
- [6] Jitendra Padhye, Victor Firoiu, Don Towsley, and Jim Kurose, "Modeling TCP Throughput: A Simple Model and its Empirical Validation", *ACM SIGCOMM 98*, pp. 303 - 314
- [7] W. Tan and A. Zakhor, "Real-Time Internet Video Using Error Resilient Scalable Compression and TCP-Friendly Transport Protocol", *IEEE Transactions on Multimedia*, June 1999, vol. 1, no. 2, pp. 172-186
- [8] J. Mahdavi and S. Floyd, "TCP-Friendly unicast rate-based flow control", *Technical note sent to end2end-interest mailing list*, [http://www.psc.edu/networking/papers/tcp\\_friendly.html](http://www.psc.edu/networking/papers/tcp_friendly.html), Jan. 1997
- [9] M. Mathis, J. Semke, J. Mahdavi, T. Ott, "The macroscopic behavior of the TCP congestion avoidance Algorithm", *CCR*, July 1997, vol. 27, No. 3
- [10] H. Balakrishnan, V. Padmanabhan, S. Seshan, R. Katz, "A comparison of mechanisms for improving TCP performance over wireless links", *ACM SIGCOMM'96*, pp.256 - 269
- [11] Wenqing Ding, Jamalipour A, "A new explicit loss notification with acknowledgment for wireless TCP", *12th IEEE International Symposium on Personal, Indoor and Mobile Radio Communications*, Part vol.1, 2001, pp.B-65-9 vol.1. Piscataway, NJ, USA.
- [12] Ratnam K, Matta I, "WTCP: an efficient mechanism for improving wireless access to TCP services", *International Journal of Communication Systems*, vol.16, no.1, Feb. 2003, pp.47-62. Publisher: Wiley, UK.
- [13] Rendon J, Casadevall F, Carrasco J, "Wireless TCP proposals with proxy servers in the GPRS network", *13th IEEE International Symposium on Personal Indoor and Mobile Radio Communications*, Part vol.3, 2002, pp.1156-60 vol.3. Piscataway, NJ, USA.
- [14] H. Balakrishnan and R. Katz, "Explicit Loss Notification and Wireless Web Performance", *IEEE Globecom Internet Mini-Conference*, Nov. 1998
- [15] Yaling Yang, Honghai Zhang, Kravets R, "Channel quality based adaptation of TCP with loss discrimination", *IEEE Global Telecommunications Conference*, Part vol.2, 2002, pp.2026-30 vol.2. Piscataway, NJ, USA.
- [16] Chiasserini CF, Meo M, "Improving TCP over wireless through adaptive link layer setting", *IEEE Global Telecommunications Conference*, Part vol.3, 2001, pp.1766-70 vol.3. Piscataway, NJ, USA.
- [17] Cobb JA, Agrawal P, "Congestion or corruption? A strategy for efficient wireless TCP sessions", *Proceedings IEEE Symposium on Computers and Communications*, 1995, pp.262-8. Los Alamitos, CA, USA.
- [18] Jin-Hee Choi, See-Hwan Yoo, Chuck Yoo, "A flow control scheme based on buffer state for wireless TCP", *4th International Workshop on Mobile and Wireless Communications Network*, 2002, pp.592-6. Piscataway, NJ, USA.
- [19] S. Biaz, N. H. Vaidya, "Discriminating congestion loss from wireless losses using inter-arrival times at the receiver", *Proc. of IEEE Symposium on Application-specific System and Software Engr. and Techn.*, pp. 10-17, Richardson, TX, Mar 1999
- [20] N. Samaraweera, "Non-congestion packet loss detection for TCP error recovery using wireless links", in *IEE Proceedings of Communications*, 146(4), pp. 222C230, Aug 1999.
- [21] Y. Tobe, Y. Tamura, A. Molano, S. Ghosh, and H. Tokuda, "Achieving moderate fairness for UDP flows by pathstatus classification," in *Proc. 25th Annual IEEE Conf. on Local Computer Networks (LCN 2000)*, pp. 252C61, Tampa, FL, Nov 2000.
- [22] Cen, S., Cosman, P., Voelker, G. "End-to-end Differentiation of Congestion and Wireless Losses", *IEEE/ACM Transactions on Networking*, Vol. 11, Iss. 5 2003
- [23] Sinha P, Venkitaraman N, Nandagopal T, Sivakumar R, Bharghavan V, "A wireless transmission control protocol for CDPD", *IEEE Wireless Communications and Networking Conference*, Part vol.2, pp.953-7 vol.2. Piscataway, NJ, USA, 1999.
- [24] Sinha P, Nandagopal T, Venkitaraman N, Sivakumar R, Bharghavan V, "WTCP: a reliable transport protocol for wireless wide-area networks", *Wireless Networks*, vol.8, no.2-3, pp.301-16. Netherlands, 2002.
- [25] Barman, D., Matta, I, "Effectiveness of Loss Labeling in Improving TCP Performance in Wired/Wireless Networks", *Proceedings of the 10th ICNP*, pp. 2-11, Washington, DC, USA, 2002
- [26] Jae-Joon Lee, Fang Liu, Kuo C-CJ, "End-to-end wireless TCP with non-congestion packet loss detection and handling", *Proceedings of Spie - the International Society for Optical Engineering*, vol.5100, 2003, pp.104-13. USA.
- [27] Guang Yang, Mario Gerla and M. Y. Sanadidi, "Adaptive Video Streaming in Presence of Wireless Errors", to appear in MMNS 2004, San Diego, CA, 2004.
- [28] Jun Liu, Ibrahim Matta, Mark Crovella, "End-to-End Inference of Loss Nature in a Hybrid Wired/Wireless Environment", *Proceedings of WiOpt'03*, 2003.
- [29] Tae-eun Kim, Songwu Lu, and Vaduvur Bharghavan, "Improving Congestion Control Performance Through Loss Differentiation", *ICPP Workshop*, pp.140-145, 1999.
- [30] C. Parsa, J.J. Garcia-Luna-Aceves, "Improving TCP congestion control over internet with heterogeneous media", *Proceedings of ICNP 99*, pp. 213-221, 1999.
- [31] F. Yang, Q. Zhang, W. Zhu, and Y.-Q. Zhang, "End-to-End TCP-Friendly Streaming Protocol and Bit Allocation for Scalable Video over Mobile Wireless Internet" *IEEE Infocom 2004*, Hongkong, China, March, 2004.
- [32] Tang, J., Morabito, G., Akyildiz, I. F., Johnson, M., "RCS: A Rate Control Scheme for Real-Time Traffic in Networks with High Bandwidth-Delay Products an High Bit Error Rates" *INFOCOM 2001*, pp. 114-122, Alaska, USA, Apr. 2001.
- [33] M. Chen and A. Zakhor, "Rate Control for Streaming Video over Wireless", *Proceeding of Infocom 2004*, Hongkong, China, March, 2004.
- [34] M. Chen and A. Zakhor, "Rate Control for Streaming Video over Wireless", to be submitted to *IEEE Trans. on Multimedia*.
- [35] Network Simulation version 2, <http://www.isi.edu/nsnam/ns/>
- [36] Jon Crowcroft and Philippe Oechslin, "Differentiated End to End Internet Services using a Weighted Proportional Fair Sharing TCP", *ACM Computer Communication Review*, vol. 28, no. 3, July 1998
- [37] NetAnts - fast download manager, <http://www.netants.com/>
- [38] traceroute, <http://www.traceroute.org/>
- [39] T. Research, "TMN (H.263) encoder/decoder, version 2.0, tmn (h.263) codec", June 1996